
NOTES: REFER TO https://info.slotdrainsystems.com/installresources FOR ALL DIMENSIONS ARE IN INCHES. CATCH BASIN BODY MATERIAL: 14GA STAINLESS STEEL T304/T316 SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES. INSTALLATION INSTRUCTIONS. UNLESS OTHERWISE SPECIFIED CRETE FLOOR (±FFL) PER ENGINEER DETAILS THREADED ROD OR REBAR REFER TO DETAIL—A CONTINUOUS LATERAL REBAR EACH SIDE CATCH BASIN DEPTH 12.0 STANDARD REFER TO -NOTE-3 ENGINEER DETAILS REINFORCED CEMENT CONCRETE PER VARIES CRETE FLOORING PER ENGINEER DETAILS

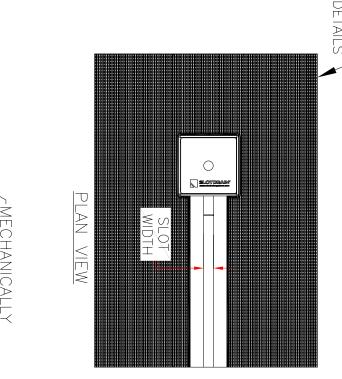

REV DESCRIPTION

REVISIONS

DATE


ВΥ

0

INITIAL RELEASE - RO

UPDATED DRAWING LAYOUT & REBAR DETAILS

11/20/2019 DK 7/14/2021 DK

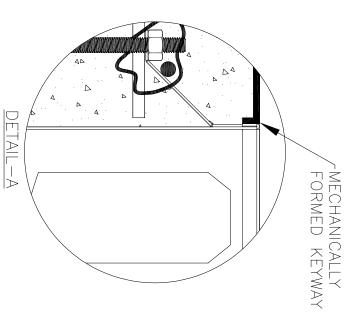

Z VARIES

2 X SLAB THICKNESS 12.0 MINIMUM

 $\subseteq M \cup M$

SLAB/PLAIN CEMENT CONCRETE

2.0 - 3.0 -

COMPACTED GRAVEL

6X6X12 NON FG CATCH BASIN INSTALLATION DETAILS

2.5

X SLAB THICKNESS. 15.0 MINIMUM

